2020/8/25 IFP9850-3.pdf




主要 特色

- UFT Technology
- Dual-Pen
- Full Native Performance on Android
- 4-way Split Screen
- Shared USB Ports



產品 說明

The ViewBoard® IFP50 series embraces UFT (Ultra Fine Touch) Technology to offer more precise writing and faster processing time than traditional IR panels. Smooth, dual-pen writing with our new, slim 2.5mm pens enables groups of teachers and students to work efficiently on any detailed tasks that require the use of accurate, fine tipped pens. The ViewBoard® IFP50 series is designed with a slim bezel to broaden your viewing experience so that even at the edge you can write clearly and confidently. Integrated myViewBoard™ digital whiteboarding software allows users to collaborate on the go, while ViewBoard® Cast provides 4-way, split screen content sharing.

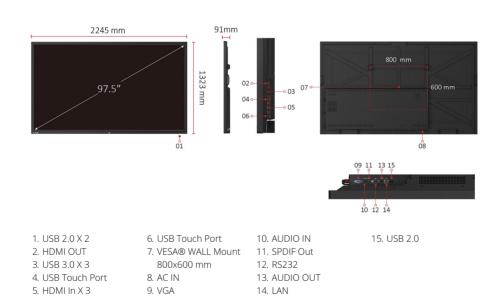

連絡 資訊 ■ www.viewsonic.com

2020/8/25 IFP9850-3.pdf

DISPLAY		USB SUPPORTED FILE FORMA	AT
Panel Size:	98"		Picture - BMP, JPEG, PNG,GIF
Type/Tech:	TFT LCD Module with DLED Backlight.	USB SUPPORTED FILE FORMAT:	Video - Codec: H.263, H.264, MJPEG, MPEG2, MPEG4, RV30/40, VP6, Xvid-ASP Container: 3GP, ASF, ASX, AVI, FLV, M4V, MKV, MOV, MP4, MPG, MPEG, RMVB, TSH.265 Audio - Codec: AAC, ALAC, FLAC,
Display Area (mm):	2171.85(H) x 1232.35(V) (97.52"diagonal)		
Aspect Ratio:	16:9		
Native Resolution:	UHD 3840x2160(Pixels)		
Colours:	1.07B colours (10bit)		
Brightness:	350 nits (typ.)		
Contrast Ratio:	1200:1 Typ. , 5000:1 Max.		MPEG 3, Vorbis, WAV, WMA
Response Time:	6ms		Container: AAC, APC, FLAC, M4A, MP3, OGG, WAV, WMA
Viewing Angles:	H = 178, V = 178 typ.	BUNDLE SOFTWARE	, -, ,
Backlight Life:	30,000 Hours (Min)	Basic Annotation Software:	myViewBoard for android
Surface Treatment:	Anti-Glare		myViewBoard for windows
Orientation:	Landscape	Pro Annotation Software:	(Embedded in Windows Slot-in PC)
PLATFORM		Wireless Presentation with	10)
Processor:	ARM Cortex A73*2(1.5GHz)+A53*2(1.2GHz)	Touch Feedback: Viewboard Cast:	ViewBoard Cast
RAM:	3GB DDR4	SPECIAL FEATURES	
Storage:	16GB	All-in-one USB port (combine Windows/Android	Front "SmartPort USB" to all channels.
гоисн		USB port; no need to	
Type/ Tech:	IR Recognition	distinguish them anymore):	
Touch Resolution:	32767 x 32767	Simple LAN sharing between IFP and slot-in	Yes
Touch Point:	20 points touch, 10 points writing	device: POWER	
NPUT		Voltage:	100-240VAC +/- 10% Wide
HDMI:	2.0 x3 (3840x2160 @60Hz)	Tonago	Range
RGB / VGA:	x1	Consumption:	171 (Typ.) < 0.5 W ("Off")
Audio:	x1 (PC audio in)	ERGONOMICS	,
RS232:	x1	Wall Mount (VESA®):	800 x 600
OPS:	Proprietary PC slot x 1	OPERATING CONDITIONS	
OUTPUT		Temperature (°C):	0°C to 40°C
HDMI:	x1	Humidity:	10% ~ 90% RH non-
Audio:	x1 (Earphone out)	•	condensing
SPDIF:	1(optical)	DIMENSIONS (W X H X D)	88.4 x 52.1 x 3.6 in / 2245 x
RS232:	x1	Physical (inch / mm):	1323 x 91 mm
LAN		Packaging (inch / mm):	97.8 x 58.8 x 14.8 in / 2483 x
RJ45:	x1	rackaging (inch / inin).	1493 x 376 mm
USB		WEIGHT	
Type A:	USB 2.0 x3 USB 3.0 x3	Net (lb / kg):	223.77 lb / 101.5 kg
Type B:	x2, for touch	Gross (lb / kg):	306 lb / 138.8 kg
SPEAKERS	XE, for todon	REGULATIONS	500 TIN
SPEAKERS:	12Wx2	REGULATIONS:	FCC, cTUVus
CAMERA PLATE ON TOP FOR	SCREW-IN WEBCAM	ENERGY STAR VERSION Energy Star version:	ES8.0
INSTALLATION		EEI RATING	L30.0
Camera plate on top for screw-in webcam	Yes	EEI rating:	A++
installation:	169	PACKAGE CONTENTS	
COMPATIBILITY		PACKAGE CONTENTS:	1. Power cable(3 meters) x 4 2
HDMI:	3840x2160		Remote control 3. USB cable(meters) 4. Touching pen x 2 5 Quick Start Guide 6. RS232 adapter 7. Clamp x 5 8. Plate 9. Screw x 8 10. HDMl cable
		COMPATIBLE SLOT-IN PC	
		Compatible Slot-in PC:	VPC14-WP series VPC10-WP series VPC15-WP series VPC16-WP series VPC17-WP series
			2

Copyright © ViewSonic Corporation 2000-2020. All rights reserved.