


Key Features

- Pre-installed ViewBoard® Cast and Zoom
- USB multimedia player
- Supports HDMI CEC pass-through
- Flicker-free and Blue Light Filter eye-care technologies
- HDMI, VGA, RS232, RJ45 input compatibility



Product Description

The ViewSonic® CDE7500 is a 75" 4K Ultra HD display with conferencing capabilities. With features including a razor sharp resolution of 3840 x 2160, ultra wide viewing angles, 2 x 20W speakers, and file sharing software, the display has been designed with the meeting room scenario in mind. The pre-installed Cast content sharing and Embedded Zoom conference software enables multiple users, whether on-site or on-line, to participate in conferences and share content with each other simultaneously, transforming CDE7500 into a dynamic content hub. This display's integrated quad-core processor and 16GB internal memory allows users to play multimedia content from a USB without the need for a PC, while the HDMI and VGA inputs offer connection with a variety of high definition devices. Flicker-free and Blue Light Filter eye-care technologies provide viewing that is comfortable for the human eye, from start to finish.

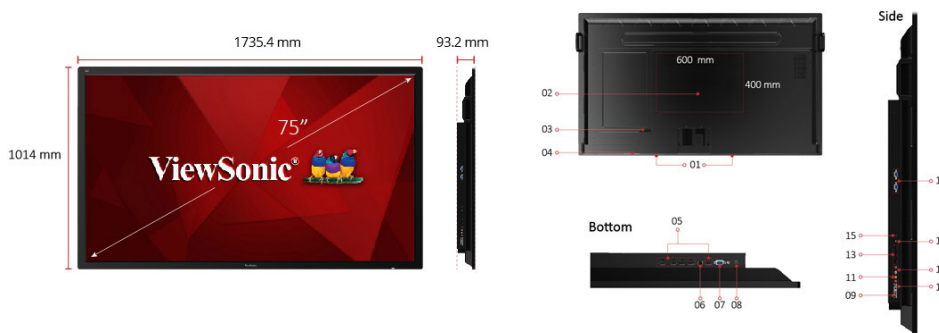

- | | | | |
|---|---------------|--------------------------|-----------------------|
| 1. Internal Speakers | 5. HDMI ports | 10. YPbPr/YCbCr IN ports | 15. SPDIF port |
| 2. VESA® Compatible Wall Mount 600 x 400 mm | 6. LAN ports | 11. AV-IN ports | 16. RS232 IN/OUT port |
| 3. AC In | 7. VGA ports | 12. AUDIO-IN ports | |
| 4. Menu Controls | 8. VGA-AUDIO | 13. USB ports | |
| | 9. AV-OUT | 14. Headset port | |

Visit Us ■ www.viewsonic.com

LCD PANEL

Panel Size:	75"
Type/ Tech:	TFT LCD Module with LED Backlight
Display Area (mm):	1649.66(H) x 927.94(V)
Aspect Ratio:	16:9
Resolution:	3840 x 2160
Colors:	1.07B colors (10bit)
Brightness:	450 nits(typ.) 400nits(min.)
Contrast Ratio:	1200:1 (typ.)
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 (typ.)
Backlight:	DLED
Backlight Life:	30,000 Hours
Orientation:	Landscape / Portrait

INPUT

HDMI:	x 4
RGB / VGA:	x 1
Audio:	x 1
CVBS:	x 1
YPbPr:	x 1
RS232:	x 1
OPS:	x 1 PC Slot (Intel OPS Standard) x1 SDM

OUTPUT

HDMI:	x 1 (for one of HDMI1/2/3)
Audio (Earphone out):	x 1
SPDIF:	x 1
RS232:	x 1

LAN

RJ45:	x 1
-------	-----

USB

2.0 Type A:	x 2 (side x1, top x1)
3.0 Type A:	x 2 (side)

SPEAKERS

20W x 2

BUILT-IN PC

Processor:	ARM Cortex A53 Quad Core 1.5G Hz CPU
Memory:	2GB
Storage:	16GB

COMPATIBILITY

VGA:	Refer to timing table
HDMI:	480i, 480p, 720p, 1080p, up to 2160p
CVBS:	480i

POWER

Voltage:	100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz
Consumption:	300 W

ERGONOMICS

Wall Mount (VESA®):	600 x 400mm; Screw: M8 x 20mm
---------------------	----------------------------------

OPERATING CONDITIONS

Temperature (° C):	32°F to 104°F (0°C to 40°C)
Humidity:	10% ~ 90% non-condensing

DIMENSIONS (W X H X D)

Physical w/o Stand (mm / inch):	1735.4 x 1014.0 x 93.2 mm / 68.32 x 39.92 x 3.67 inch
Packaging (mm / inch):	1990 x 1165 x 320 mm / 78.35 x 45.87 x 12.60 in

WEIGHT

Net w/o Stand (kg / lb):	43.05 kg / 94.91lbs
Gross (kg / lb):	65.40 kg / 144.18lbs

REGULATIONS

Standard:	cTUVus, FCC, MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, CCC, China Energy Label
-----------	---

WHAT'S IN THE BOX?

1. Power cable(1.5 meters) x 4 (EU, AU, UK, US)
2. Remote control with batteries
3. User manual CD wizard